


### TJ-S

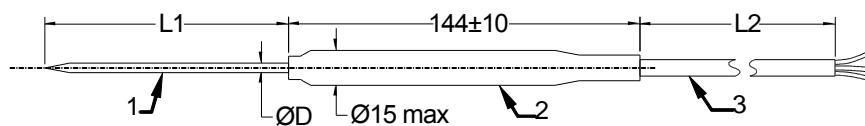

Operating temperature:  
-50÷180°C

ØD, mm		L1, mm		L2, mm	
3	*	50	*		*
4	S	100	S	3000	S
6	*	150	*		

S- standard;  
\*-on request;

1- tube (stainless steel - DIN 1.4541 (AISI 321));  
2- housing (stainless steel (DIN1.4301)+PVC#);  
3- cable 3-wire, silicone (rubber or PVC) isolation;

S- standard

\*- on request

# - isolation

SIL – silicone (temperature: -50...+180°C)

PVC – (temperature: -30...+70°C)

Sensors – K, J, Pt100 (on request- Pt1000)

Other versions: PTC, NTC, ...



**AUREGIS UAB**

Savanorių pr. 271/ Mituvos g. 2, Kaunas LT-50131

**Tel./fax.:** +370 37 313426

**Mob. :** (+370) 686 38409, 614 34419, 686 54049,  
698 74609, 614 71784

**El. paštas:** info@auregis.lt      www.auregis.lt